



Version 5.9

Basics of Adapter for SAP

Manual

Document: **Manual - Basics of Adapter for SAP**

Created: **2018-02-15**

Last changes: **2019-07-02**

Author: **AEgilmez**



COPYRIGHT 2019 BY **FORCAM GMBH**, D-88214 Ravensburg
ALL RIGHTS RESERVED. COPY OR TRANSLATION, ALSO IN EXTRACTS
ONLY WITH WRITTEN PERMISSION BY FORCAM GMBH

Content

| | | |
|----------|--|-----------|
| 1 | General Introduction | 5 |
| 2 | IDoc Basics..... | 6 |
| 2.1 | IDoc Terminologies..... | 6 |
| 2.1.1 | IDoc (Basic) Type..... | 6 |
| 2.1.2 | IDoc Extension | 6 |
| 2.2 | Steps in IDoc Configuration | 6 |
| 2.2.1 | The Outbound Process | 7 |
| 2.2.2 | The Inbound Process | 7 |
| 2.2.3 | Manage Table Entries | 7 |
| 3 | IDoc Structure and Records..... | 8 |
| 3.1 | General IDoc Structure | 8 |
| 3.2 | IDoc Records | 8 |
| 3.2.1 | Control Record (EDIDC) | 8 |
| 3.2.2 | Data Record (EDID4) | 9 |
| 3.2.3 | Status Records(EDIDS) | 10 |
| 4 | Interface Maintenance | 11 |
| 4.1 | Introduction | 11 |
| 4.2 | Searching IDocs in SAP | 11 |
| 4.3 | Testing and Editing IDocs..... | 12 |
| 4.4 | Converting IDoc Status (“Logical deletion”)..... | 12 |
| 4.5 | Automatic/Immediate Processing..... | 13 |
| 4.6 | Reprocessing IDocs..... | 14 |
| 4.6.1 | Reprocessing IDoc Using BD87 | 14 |
| 4.6.2 | Reprocessing IDocs Using /FFMES/IDoc_MON..... | 15 |
| 4.7 | Error Handling for Non-Posted IDoc..... | 16 |
| 4.8 | IDoc Deletion | 17 |
| 4.9 | Re-Send IDocs to FORCAM FORCE™ | 18 |
| 4.10 | Mass Transfer of Orders to FORCAM FORCE™ | 19 |
| 5 | Fine-Tuning the FORCAM FORCE™ Adapter for SAP | 20 |
| 5.1 | Table /FFMES/CONTROL_V..... | 20 |
| 5.1.1 | Functionality | 20 |

General Introduction

| | |
|---|-----------|
| 5.1.2 Existing Parameters and Their Use | 21 |
| 5.1.2.1 CHECK_IDOC_PRED - Check Activity Status of IDoc Predecessor | 21 |
| 5.1.2.2 ACTIV_CLEAR_RES - Clear Open Reservations if Final Confirmation | 21 |
| 5.1.2.3 ACTIV_NO_REMN_n - Indicator: No Remaining Activity Expected for Standard Value | 21 |
| 5.1.2.4 ACTIV_SEQUENCES - Activate Sequences | 21 |
| 5.1.2.5 ALLOW_BLCK_PERD - Allow Booking in Blocked Period | 21 |
| 5.1.2.6 CHECKLOCK_INACT - CHECK_LOCK Not Active | 22 |
| 5.1.2.7 CHECK_AFOLG_S_D - Check Operations for Deletion and Insertion Entries | 22 |
| 5.1.2.8 CHECK_COMPL_DWN - Check Complete Component Download | 22 |
| 5.1.2.9 CHECK_DUMMY_ORD - Check for Dummy Orders | 22 |
| 5.1.2.10 CHK_ACT_SYSID_x - Indicator: Active Check for SYSID | 22 |
| 5.1.2.11 DONOTUSEF_xxx - Do Not Use xxx in Confirmations | 22 |
| 5.1.2.12 INACTIV_FINCONF - Indicator: FIN_CONF Not Active if Final Confirmation | 23 |
| 5.1.2.13 OPEND_TAR_ACTIn - Indicator: Determine Target Activity if OPEND - Standard Value n | 23 |
| 5.1.2.14 POST_ALL_CONFIR - Post All MES Confirmations | 23 |
| 5.1.2.15 QTYMG_TAR_ACTIn - Indicator: Determine Target Activity if QTYMG - Standard Value n | 24 |
| 5.2 Table /FFMES/CONF_QTY (optional) | 24 |
| 5.2.1 Main purpose | 24 |
| 5.2.2 Functionality | 24 |
| 5.2.3 Table Maintenance | 25 |
| 5.3 Table /FFMES/CONST (optional) | 26 |
| 5.3.1 Main purpose | 26 |
| 5.3.2 Functionality | 26 |
| 5.3.3 Table Maintenance | 26 |
| 5.4 Table /FFMES/DELETE_PO (optional) | 28 |
| 5.4.1 Main purpose | 28 |
| 5.4.2 Functionality | 28 |
| 5.4.3 Table Maintenance | 29 |
| 5.5 Table /FFMES/FILTER (optional) | 30 |
| 5.5.1 Main purpose | 30 |
| 5.5.2 Functionality | 30 |
| 5.5.3 Table Maintenance | 31 |
| 5.6 Table /FFMES/SKIP_MSG (optional) | 32 |
| 5.6.1 Main purpose | 32 |
| 5.6.2 Functionality | 32 |
| 5.6.3 Table Maintenance | 32 |
| 5.7 Table /FFMES/STATUS (optional) | 33 |
| 5.7.1 Main purpose | 33 |

General Introduction

| | | |
|------------|---|-----------|
| 5.7.2 | Functionality | 33 |
| 5.7.3 | Table Maintenance | 34 |
| 5.8 | Table /FFMES/STDVAL (optional) | 35 |
| 5.8.1 | Main purpose..... | 35 |
| 5.8.2 | Functionality | 35 |
| 5.8.3 | Table Maintenance | 36 |
| 6 | Annex: Table of Figures..... | 38 |

1 General Introduction

This manual has been written for end users of the FORCAM FORCE™ Adapter for SAP. It contains useful information for handling and successfully working with FORCAM software. Answers to the most common questions will be given and users can find basic hints for initial problem solutions and maintenance.

For more detailed information about the FORCAM FORCE™ Adapter for SAP, see the Adapter Customizing manual which is provided separately.

2 IDoc Basics

IDocs are structured ASCII files (or a virtual equivalent). They are the file format used by SAP R/3 to exchange data with foreign systems. This technique is a SAP standard feature and used in many communication scenarios.

IDoc is the acronym for Interchange Document (Intermediate Document). This indicates a set of (electronic) information which builds a logical entity. An IDoc is e.g. all the data of a single customer in your customer master data file, or the IDoc is all the data of a single invoice.

The FORCAM Adapter is using IDoc based communication with specific FORCAM developed IDoc basic types.

The information, exchanged by IDoc, is called as message and the IDoc is the physical representation of such a message. The name “messages” for the information sent via IDocs is used in the same ways as other EDI standards.

An IDoc is created by executing an outbound ALE or EDI process.

2.1 IDoc Terminologies

2.1.1 IDoc (Basic) Type

IDoc types are based on the EDI standards and mostly on EDIFACT standards.

Basic types (or IDoc types) define the structure of an IDoc. Each basic type describes standard IDoc segments, format of data fields and their size. Basic types also define the number of segments and fields in an IDoc. All the fields that are necessary for the transmission of a message for a particular object are mapped in different segments. It also defines the structure and relationship of IDoc segments along with mandatory and optional segments.

2.1.2 IDoc Extension

Basic type contains all the standard fields that are necessary for carrying out a business process. However, if any additional values are required to send to the partner, you can make use of the IDoc extension feature. IDoc extension is an extension of basic type and contains additional custom IDoc segments and fields that are not available in standard basic type.

The process of data transfer out of the SAP system is called outbound process, while that of data moving into the SAP system is called inbound process.

2.2 Steps in IDoc Configuration

- i** More detailed information about the FORCAM FORCE™ Adapter IDoc configuration can be found in the Adapter Customizing manual.

A complete interface setup requires additional table maintenance of FORCAM specific tables.

Below are the basic standard configurations which are required as a prerequisite for ALE-IDoc setup.

- Logical system (transaction **SALE**)
- Setup RFC destinations (transaction **SM59**)
- Port definition (transaction **WE21**)

2.2.1 The Outbound Process

Steps involved:

1. Create segments (**WE31**).
2. Create an IDoc type (**WE30**).
3. Create a logical message type (**WE81**).
4. Associate a logical message type to IDoc type (**WE82**).
5. Create the function module or standalone program which will create the IDoc.
In the FORCAM Adapter, no message controlled IDoc creation is used.
6. Create a partner profile (**WE20**) with the necessary information in the outbound parameters for the partner you want to exchange the IDoc with.

2.2.2 The Inbound Process

Steps Involved:

1. Define process code (**WE42**).
2. Allocate the inbound function module to the message type (**WE57**).
3. Define the function module characteristics (**BD51**).
4. Create a partner profile (**WE20**) with the necessary information in the inbound parameters for the partner you want to exchange the IDoc with.
5. Set up ALIAS for IDoc XML service (**SICF**).

2.2.3 Manage Table Entries

Customizing tables for the FORCAM Adapter package are maintained via transaction **SM30**.

The following tables are customizing tables and are managed only via transport:

- /FFMES/GLOBAL
- /FFMES/VERTEILER
- /FFMES/KORR_CUST
- /FFMES/CONTROL_V

Following are all application tables that must be managed in each system. The contents of these tables are not transported:

- /FFMES/PARM
- /FFMES/CONTROL
- /FFMES/AUFTR
- /FFMES/FA_FELDER

3 IDoc Structure and Records

3.1 General IDoc Structure

The IDoc structure is divided into **Control Record**, **Data records** and **Status records**. These records are stored in the transparent tables in SAP. These are **EDIDC**, **EDID4** and **EDIDS**.

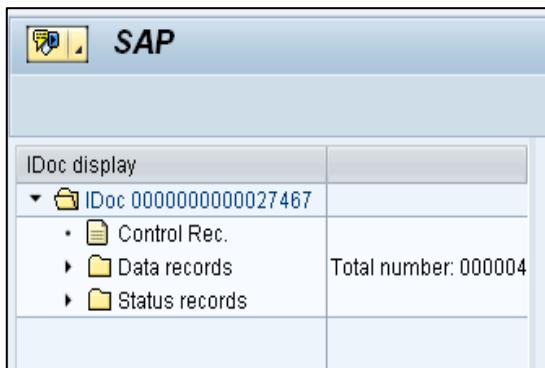


Fig. 1: SAP screen displaying the IDoc structure

3.2 IDoc Records

3.2.1 Control Record (EDIDC)

Contains information such as IDoc number, direction, IDoc status, basic type, message type, partner (sender/receiver), date and time of creation/update, interchange file or ISA number etc.

IDoc Structure and Records

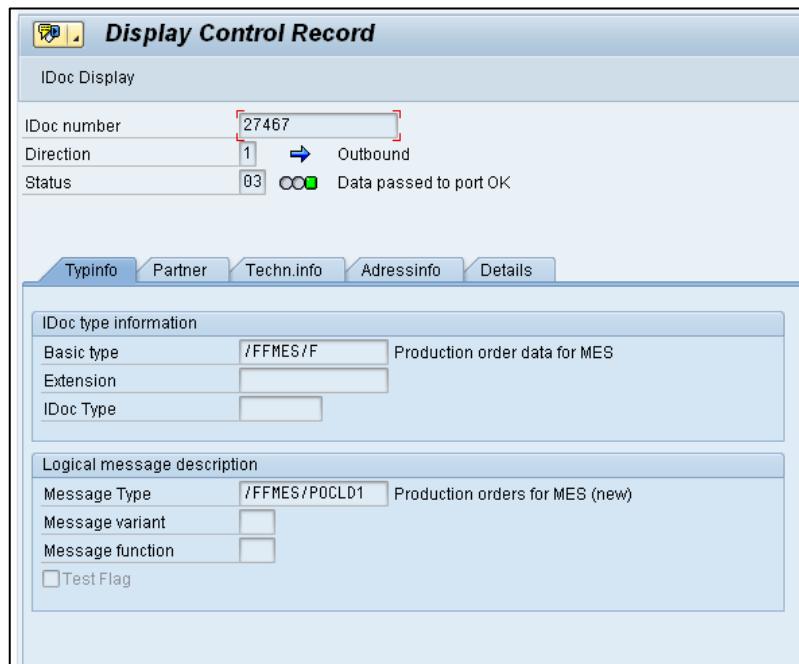


Fig. 2: Display Control Record screen

3.2.2 Data Record (EDID4)

Contains the details of the IDoc segments. An IDoc segment has fields that contain the data necessary for posting the documents.

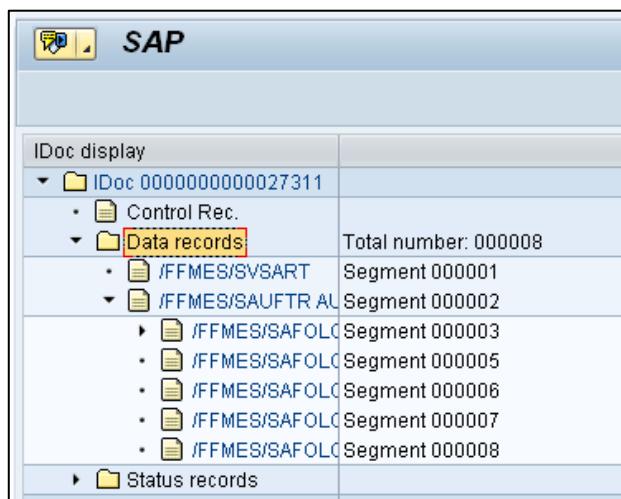


Fig. 3: SAP screen displaying Data Record

3.2.3 Status Records(EDIDS)

The IDoc status defines the processing status of the IDoc. IDoc statuses are used to track the IDoc and its various processing states. The status number represents the IDoc status. The current sequence of all the statuses an IDoc has passed through are found in **Control Record**.

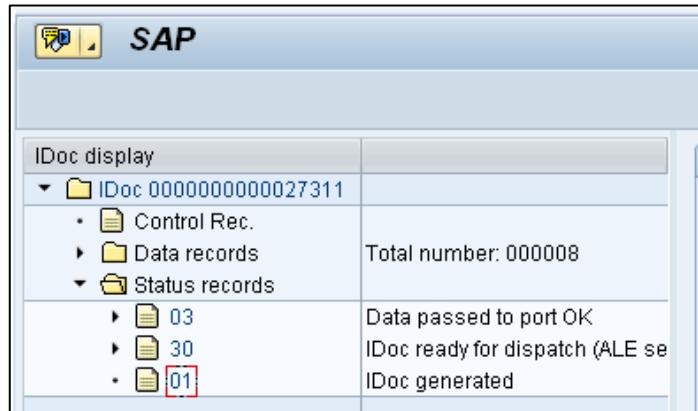


Fig. 4: SAP screen displaying Status Record

4 Interface Maintenance

4.1 Introduction


The FORCAM Adapter is an IDoc based interface which is a typical batch processing. User action is only required in IDoc monitoring, error handling or supervisor activities.

4.2 Searching IDocs in SAP

Transaction code WE02/WE05: General Search

IDocs can be viewed in the system via transaction codes **WE02** and **WE05**.

If the IDoc number is not known, the search can be made based on IDoc date, direction, basic type, message type, and partner number.

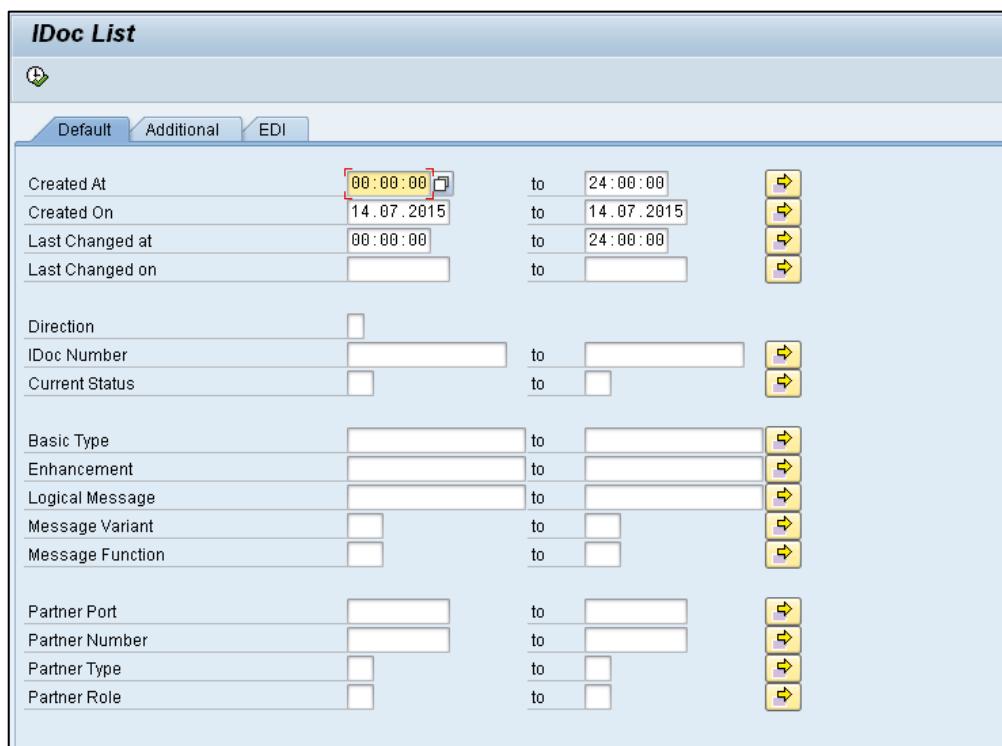

The screenshot shows the SAP transaction screen for searching IDocs. It features a grid of search fields with dropdown arrows for each field. The fields include:

- Created At: 00:00:00 to 24:00:00
- Created On: 14.07.2015 to 14.07.2015
- Last Changed at: 00:00:00 to 24:00:00
- Last Changed on: [empty] to [empty]
- Direction: [empty]
- IDoc Number: [empty] to [empty]
- Current Status: [empty] to [empty]
- Basic Type: [empty] to [empty]
- Enhancement: [empty] to [empty]
- Logical Message: [empty] to [empty]
- Message Variant: [empty] to [empty]
- Message Function: [empty] to [empty]
- Partner Port: [empty] to [empty]
- Partner Number: [empty] to [empty]
- Partner Type: [empty] to [empty]
- Partner Role: [empty] to [empty]

Fig. 5: SAP Screen IDoc List

4.3 Testing and Editing IDocs

If an IDoc contains error in the data, such IDocs can be edited using transaction code **WE02** or **WE05**. When an IDoc is edited, the original IDoc information (backup) is saved in a new IDoc under status **70** (inbound)/**33** (outbound). These IDocs remain in the system for reference only. The status of the edited IDoc becomes **69** (inbound) and **32** (outbound).

Debugging of IDocs can be done using transaction code **WE19**.

WE19 is a test tool for IDoc processing. WE19 copies the existing IDoc and creates a new IDoc, which can then be modified as per testing needs.

4.4 Converting IDoc Status (“Logical deletion”)

Status **68** means “No further processing”. This status prevents an IDoc from being booked. Any reprocessing job will not consider those IDocs and IDocs are no longer in error state (red).

Logical IDoc deletion may be helpful in some cases where IDoc cannot be processed anymore. This can happen e.g. if the booking period had already been locked or any wrong booking was tried.

There are different options to change IDoc status:

1. SAP standard report **RC1_IDOC_SET_STATUS**

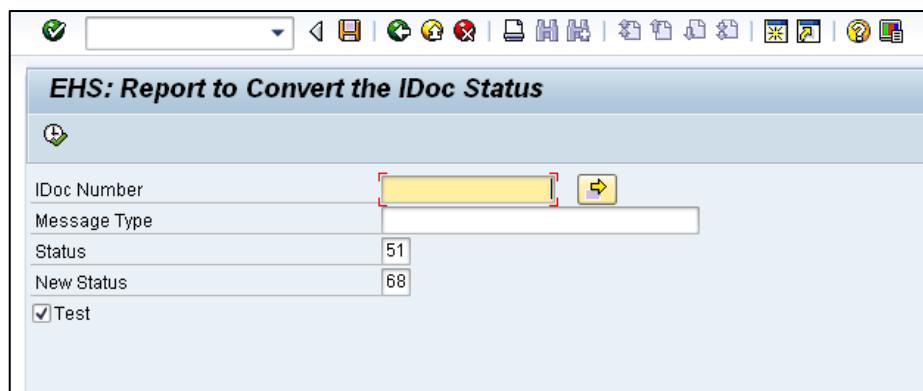


Fig. 6: Selection Screen of Report RC1_IDOC_SET_STATUS

2. Report **/FFMES/IDOC_DELETE** (for more details see section 4.8)

4.5 Automatic/Immediate Processing

IDoc processing by background job is the most preferred way of processing IDocs. Process code refers to a workflow or a function module which helps in reading or writing data from/to the IDoc. Process codes provided with the FORCAM Adapter must be configured in the system to process the inbound and outbound IDocs.

In this case, IDocs are processed immediately as they are generated or added in the system. The radio button **Transfer IDoc immediately** is selected in outbound options and **Trigger Immediately** is selected in inbound options. These checks are generally used when the real-time information exchange is necessary between two systems.

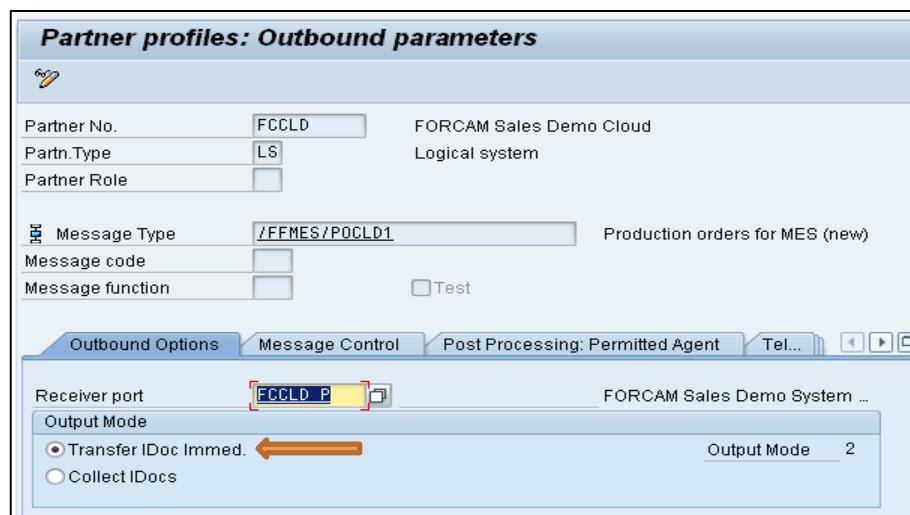


Fig. 7: SAP screen Partner profiles: Outbound parameters

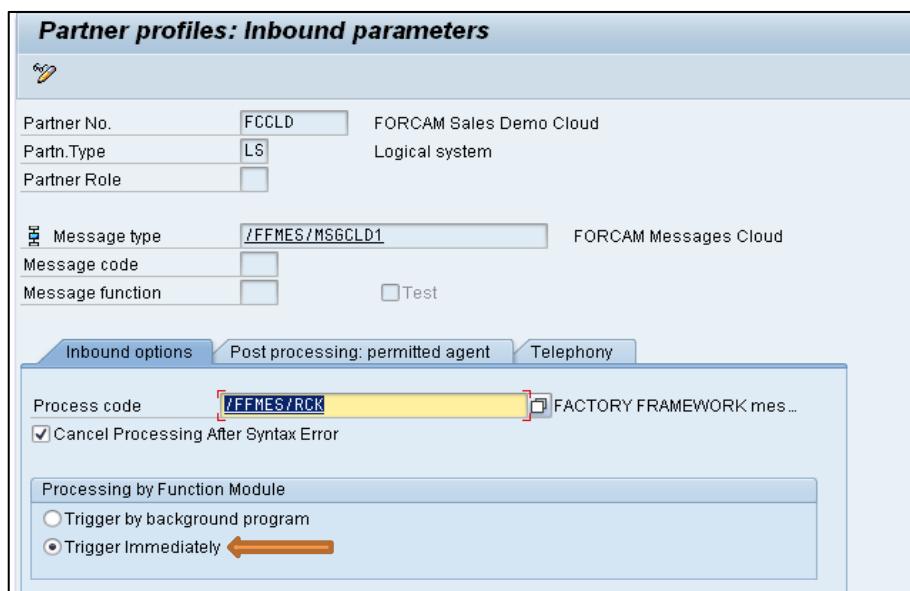


Fig. 8: SAP screen Partner profiles: Inbound parameters

4.6 Reprocessing IDocs

IDocs can also be manually processed resp. reprocessed in SAP.

If one IDoc is created on the system, but due to some problem (e.g. RFC not working or system is down) it is not received by another system, you can reprocess the same IDoc after solving the system problem by using the standard SAP transaction code, and there is an additional FORCAM Adapter specific report available. There is no need to create a new IDoc.

4.6.1 Reprocessing IDoc Using BD87

IDocs in error state can be manually processed resp. reprocessed using the transaction code **BD87** in SAP.

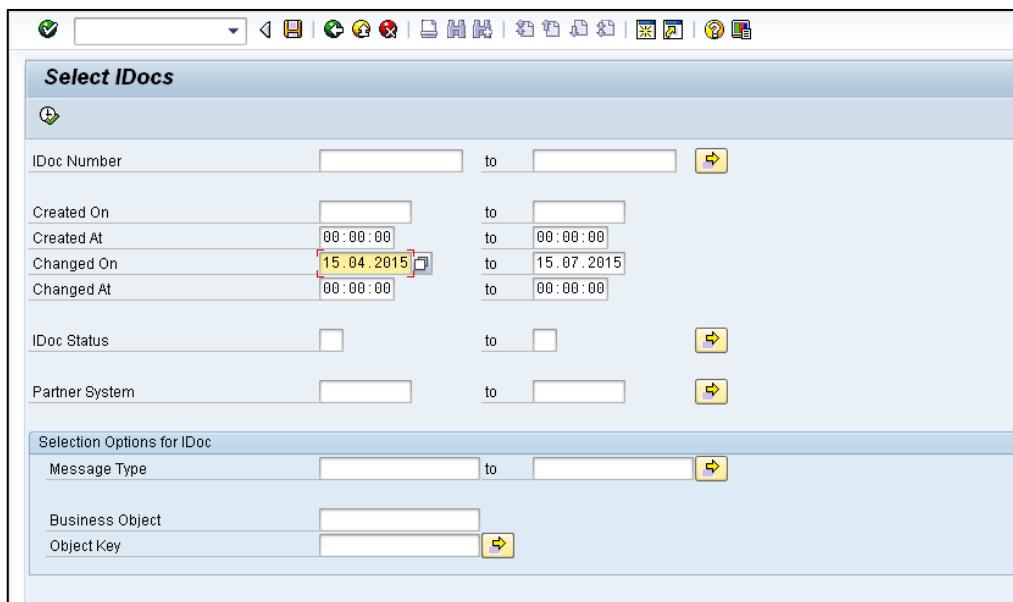


Fig. 9: Selection screen for IDoc list

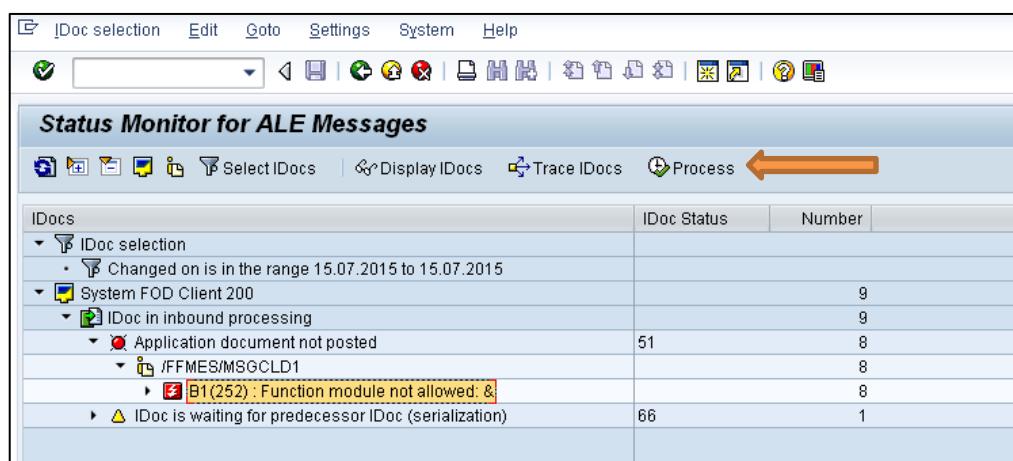


Fig. 10: SAP screen: Status Monitor for ALE Messages

4.6.2 Reprocessing IDocs Using /FFMES/IDoc_MON

The FORCAM report **/FFMES/IDoc_MON** can be used for easy and convenient IDoc monitoring. This report allows handling all inbound error IDocs (status **51**).

Using this report, IDocs in error state can be reprocessed. There are options for processing IDocs with serialization issues or any other error in the system.

IDocs are processed, after solving the system issue, by executing any of the options directed below, i.e. **Process IDoc** or **Process IDoc with serialization**.

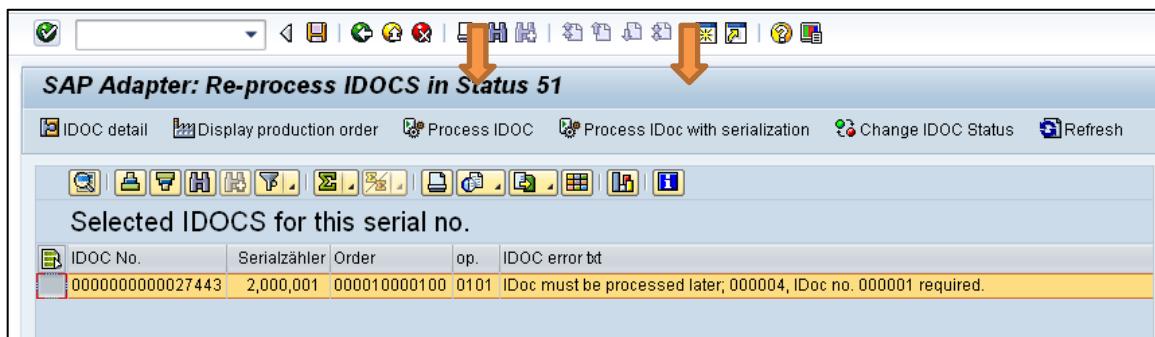


Fig. 11: FORCAM Adapter screen for re-processing IDocs

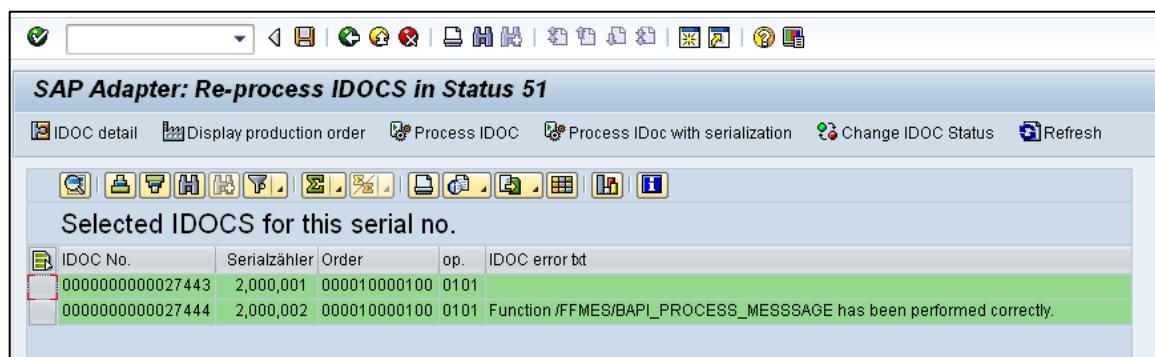


Fig. 12: FORCAM Adapter screen after Re-Processing IDocs

After the serialization issue is resolved, the status changes to **53**:

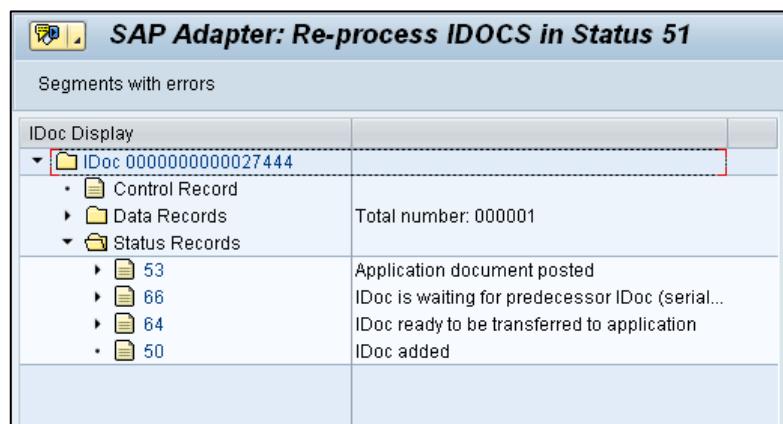


Fig. 13: SAP screen displaying Status Records

4.7 Error Handling for Non-Posted IDoc

SAP Report: RBDMANIN

This program ensures that not yet posted (caught up) IDocs are automatically entered later. This report should run as a regular batch job in a SAP system with active FORCAM Adapter. Details on how to schedule reports can be found in the SAP standard documentation.

Create a report version first, then schedule the job using transaction **SM36**.

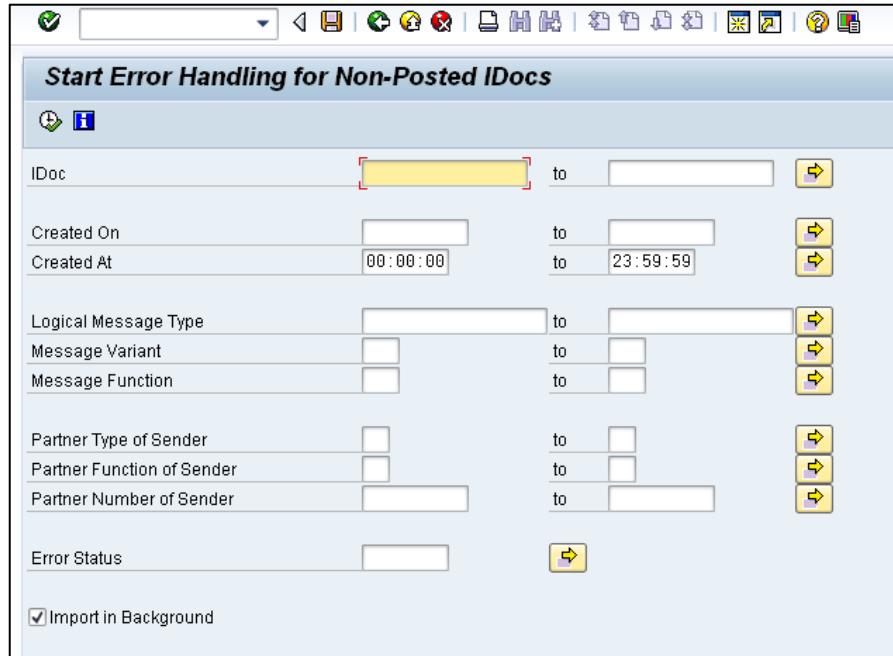


Fig. 14: Selection screen of report RBDMANIN

When serialization is active, the transfer-ready incoming IDocs that are waiting in status **66** after an error occurred, must be initiated again.

This task can be taken-over by report **RBDAPP01** that should be scheduled as regular batch run for this purpose.

 The report RBDMANIN is not able to initiate the IDocs in status 66 for processing.

Inbound Processing of IDocs Ready for Transfer

IDoc selection Parallel Proc.

| | | | |
|---|------------|---------------|-----|
| IDoc number | [] | to [] | [] |
| Created on | [] | to [] | [] |
| Created at | [00:00:00] | to [23:59:59] | [] |
| IDoc Status | [] | to [] | [] |
| Message type | [] | to [] | [] |
| Message Variant | [] | to [] | [] |
| Message function | [] | to [] | [] |
| Sender partner type | [] | to [] | [] |
| Sender partner no. | [] | to [] | [] |
| Sender partn.funct. | [] | to [] | [] |
| Pack. Size | [5] | | |
| Test Flag | [] | to [] | |
| for active object channel serializ. | | | |
| Object Type | [] | to [] | [] |
| Output Control | | | |
| <input checked="" type="checkbox"/> Output List | | | |

Fig. 15: Selection screen of report RBDAPP01

4.8 IDoc Deletion


This section describes the deletion of specific IDocs. The report **/FFMES/IDOC_DELETE** is used instead of the existing SAP standard tools (transaction **WE11**).

Two options are available to delete IDocs:

- Delete completely = remove from all databases
- Delete logically = set a new status that excludes the IDoc from further processing (status **68**)

To execute the deletion, you can use the SAP standard function module **EDI_DOCUMENT_DELETE**. It is possible to run a simulation to check the selection.

When deleting logically, a new status is set (**68** = no further processing). This change is only possible with IDocs in the IDoc inbox.

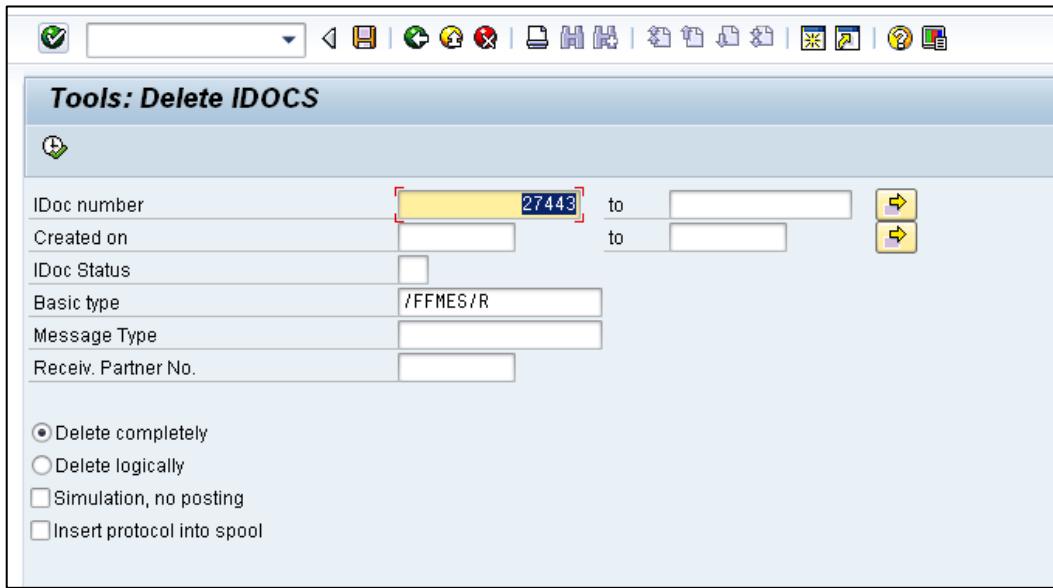

The screenshot shows the SAP selection screen for report /FFMES/IDOC_DELETE. The title bar says "Tools: Delete IDOCS". The form contains fields for IDoc number (27443), Created on, IDoc Status, Basic type (/FFMES/R), Message Type, and Receiv. Partner No. There are also several selection options at the bottom:


- Delete completely
- Delete logically
- Simulation, no posting
- Insert protocol into spool

Fig. 16: Selection screen of Report /FFMES/IDOC_DELETE

4.9 Re-Send IDocs to FORCAM FORCE™

Connection between SAP and FORCAM FORCE™ can be lost in some special situations. It can happen that the service on the FORCAM server is not running correctly or other technical problems may happen. This results in un-sent IDocs in the SAP IDoc outbox.

You can use the report /FFMES/RBDAGAIN_HTTP to re-send outbound IDocs to the FORCAM system (production order data). This report considers all changes since the last transfer and sends the correct IDoc.

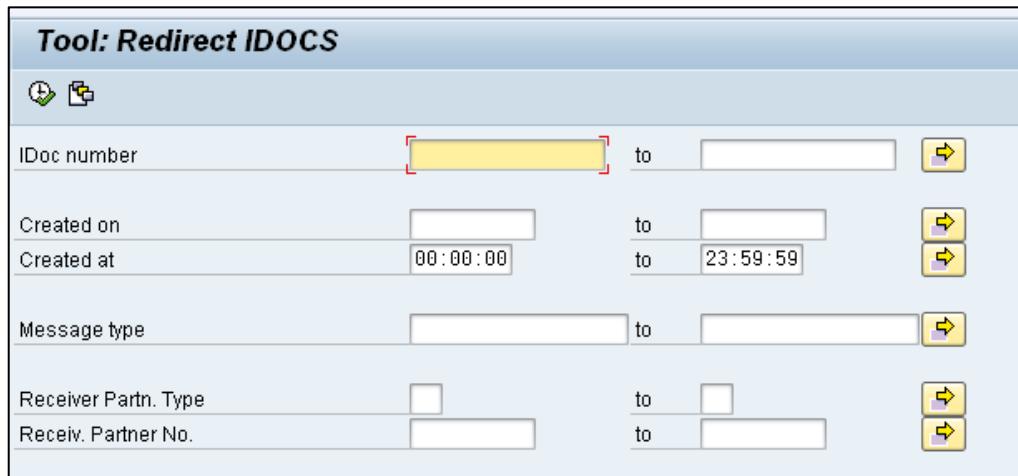

The screenshot shows the SAP selection screen for report /FFMES/RBDAGAIN_HTTP. The title bar says "Tool: Redirect IDOCS". The form contains fields for IDoc number, Created on, Created at (00:00:00 to 23:59:59), Message type, Receiver Partn. Type, and Receiv. Partner No. There are also several selection options on the right side of each row:

Fig. 17: Selection screen of report /FFMES/RBDAGAIN_HTTP

4.10 Mass Transfer of Orders to FORCAM FORCE™

Production order data are transferred via outbound IDocs automatically on order release or after order changes. BADI implementation (SAP standard BADI “work order update”) allows this functionality.

Sometimes it will be necessary to transfer selected orders apart from this logic, e.g. after the implementation of a new machine into the FORCAM interface or the start of a new FORCAM installation. The report **/FFMES/TRANSFER_ORDER_SPEC** was created for this task.

This report creates IDocs with basic type **/FFMES/F**. The function module from BADI implementation is used for the IDoc creation.

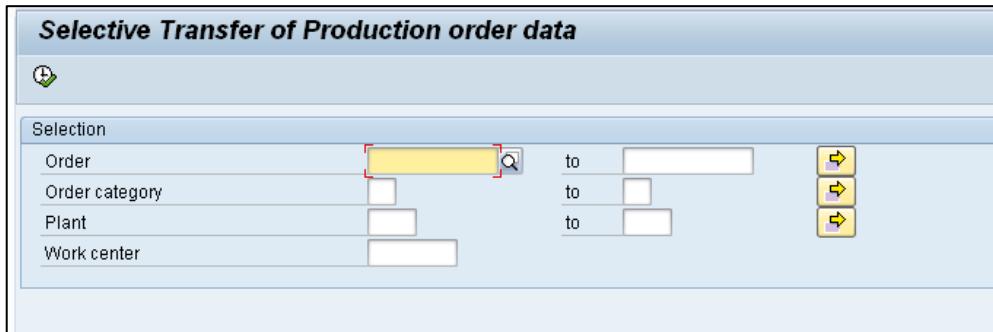


Fig. 18: Selection screen of report /FFMES/TRANSFER_ORDER_SPEC

5 Fine-Tuning the FORCAM FORCE™ Adapter for SAP

The FORCAM Adapter can be easily adjusted to meet several additional requirements after initial setup. These features are not mandatory but might be helpful in certain installations.

5.1 Table /FFMES/CONTROL_V

5.1.1 Functionality

Table **/FFMES/CONTROL_V** contains most important global control parameters for the FORCAM Adapter. It is the parameter value table for table **/FFMES/CONTROL**. Here you can switch on the necessary parameters.

The following example shows how an activated parameter is displayed in table **/FFMES/CONTROL**:

| Table /FFMES/CONTROL Display | |
|------------------------------|-----------------|
| Check Table... | |
| Client | 100 |
| Plant | 0100 |
| Control parameter | CHECK_IDOC_PRED |
| Parameter type | X |

Fig. 19: Activated parameter in table **/FFMES/CONTROL**

/FFMES/CONTROL_V is a customizing table. Content of this table is transported and must be maintained only in a development/customizing system. Changes must be imported via transport request.

Parameters to be activated must have an entry in table **/FFMES/CONTROL_V**.

/FFMES/CONTROL is an application table. Content of this table is not transported and must be maintained separately in each system.

All parameters can be switched on according to desired functionality. No parameter is mandatory except **CHECK_IDoc_PRED**.

5.1.2 Existing Parameters and Their Use

5.1.2.1 CHECK_IDOC_PRED - Check Activity Status of IDoc Predecessor

This parameter is most commonly used. It must be activated to allow serialization of incoming IDocs on operation level.

This serialization is used in all standard installations as a default. For more details see the Adapter Customizing manual.

5.1.2.2 ACTIV_CLEAR_RES - Clear Open Reservations if Final Confirmation

This parameter is used in booking of confirmations. If the parameter is activated, all open reservations will be cleared while booking final confirmation (function module **BAPI_PRODORDCONF_CREATE_TT**).

5.1.2.3 ACTIV_NO_REMN_n - Indicator: No Remaining Activity Expected for Standard Value

This parameter is used in booking of confirmations with record type **L40** (final confirmation). If the parameter is activated, the indicator “No remaining activity expected” will be set active (function module **BAPI_PRODORDCONF_CREATE_TT**).

Every standard value has a single parameter which must be activated separately:

- ACTIV_NO_REMN_1
Indicator: No remaining activity expected for standard value 1
- ACTIV_NO_REMN_2
Indicator: No remaining activity expected for standard value 2
- ACTIV_NO_REMN_3
Indicator: No remaining activity expected for standard value 3
- ACTIV_NO_REMN_4
Indicator: No remaining activity expected for standard value 4
- ACTIV_NO_REMN_5
Indicator: No remaining activity expected for standard value 5
- ACTIV_NO_REMN_6
Indicator: No remaining activity expected for standard value 6

5.1.2.4 ACTIV_SEQUENCES - Activate Sequences

This parameter is used in download of production order data in the function module for IDoc creation. It controls the download of sequence data to MES.

If the parameter is set to inactive, only operation data for the sequence **000000** are sent to the FORCAM system.

5.1.2.5 ALLOW_BLCK_PERD - Allow Booking in Blocked Period

This parameter is used in confirmation booking after checking of booking period.

If the parameter is set active, posting date will be set to actual date (SY-DATUM) and booking will be made. Otherwise the posting date will remain the shift date from the incoming IDoc and booking will be tried. In this case an error will occur (red IDoc).

5.1.2.6 CHECKLOCK_INACT - CHECK_LOCK Not Active

This parameter is used in IDoc inbound processing.

If the parameter is set active, no locking attempts (5 times) will be made. The IDoc goes directly into error if the order is locked by another process.

5.1.2.7 CHECK_AFOLG_S_D - Check Operations for Deletion and Insertion Entries

This parameter is used in the IDoc outbound process.

In the function module for production order of an IDoc creation, this parameter is used to generate correct IDocs after re-reading master data.

If this parameter is active, deletion (D) records for one order operation are not sent if a creation (S) record is sent in that IDoc for the same order operation.

5.1.2.8 CHECK_COMPL_DWN - Check Complete Component Download

This parameter is used in the IDoc outbound process.

As standard, component information (**AFOKO** segment) is only sent completely at order release or after changes of components. The parameter **CHECK_COMPL_DWN** must be set active if complete component information (all components of order) are to be sent with every download of production order data.

5.1.2.9 CHECK_DUMMY_ORD - Check for Dummy Orders

This parameter is used in the IDoc inbound process.

Wrong order numbers can cause unnecessary error IDocs. If the parameter is set active, the order number is checked against SAP tables and the IDoc will be set to status **68** if the order does not exist in SAP.

5.1.2.10 CHK_ACT_SYSID_x - Indicator: Active Check for SYSID

This group of parameters is used in the IDoc outbound process.

SAP system ID (**SYSID**) is an additional key field which can be transferred to the FORCAM system.

If the parameter is set active, **SYSID** is filled in IDoc segments and transferred to the FORCAM system.

There are separate parameters for production order data, HR data and shift data:

- **CHK_ACT_SYSID_F**
Indicator: Active check for SYSID - PROD. ORDER
- **CHK_ACT_SYSID_H**
Indicator: Active check for SYSID - HR DATA
- **CHK_ACT_SYSID_S**
Indicator: Active check for SYSID - SHIFT DATA

5.1.2.11 DONOTUSEF_xxx - Do Not Use xxx in Confirmations

This group of parameters is used in confirmation booking (inbound IDocs from FORCAM).

If the parameter is set active, certain fields are not filled in confirmations.

There are separate parameters for work center, personnel number and time recording card:

- **DONOTUSEF_ARBPL**: Do not use work center in confirmations
- **DONOTUSEF_PERNR**: Do not use personnel number in confirmations
- **DONOTUSEF_ZAUSW**: Do not use time recording ID card number in confirmations

5.1.2.12 INACTIV_FINCONF - Indicator: FIN_CONF Not Active if Final Confirmation

This parameter is used in confirmation booking with record type **L40** (final confirmation). If the parameter is set active, the indicator for final confirmation will not be set.

5.1.2.13 OPEND_TAR_ACTIn - Indicator: Determine Target Activity if OPEND - Standard Value n

This group of parameters is used in confirmation booking with record type **L40**. It is used for bookings of target activities (planned = actual).

There are parameters for each standard value which can be activated independently:

- OPEND_TAR_ACTI1
Indicator: Determine target activity if OPEND - standard value 1
- OPEND_TAR_ACTI2
Indicator: Determine target activity if OPEND - standard value 2
- OPEND_TAR_ACTI3
Indicator: Determine target activity if OPEND - standard value 3
- OPEND_TAR_ACTI4
Indicator: Determine target activity if OPEND - standard value 4
- OPEND_TAR_ACTI5
Indicator: Determine target activity if OPEND - standard value 5
- OPEND_TAR_ACTI6
Indicator: Determine target activity if OPEND - standard value 6

Target activity is determined in these cases at operation end.

5.1.2.14 POST_ALL_CONFIR - Post All MES Confirmations

This parameter is used in activity confirmation processing (inbound IDocs).

If the parameter is set active, all confirmations with record type **L20** must to be booked.

If the parameter is not set, only the first activity booking with **L20** will be booked.

This logic applies to **OPSTR** and **OPINT** bookings.

5.1.2.15 QTYMG_TAR_ACTIn - Indicator: Determine Target Activity if QTYMG - Standard Value n

This group of parameters is used in confirmation booking of quantities. It is used for bookings of target activities (planned = actual).

There are parameters for each standard value which can be activated independently:

- QTYMG_TAR_ACTI1
Indicator: Determine target activity if QTYMG - standard value 1
- QTYMG_TAR_ACTI2
Indicator: Determine target activity if QTYMG - standard value 2
- QTYMG_TAR_ACTI3
Indicator: Determine target activity if QTYMG - standard value 3
- QTYMG_TAR_ACTI4
Indicator: Determine target activity if QTYMG - standard value 4
- QTYMG_TAR_ACTI5
Indicator: Determine target activity if QTYMG - standard value 5
- QTYMG_TAR_ACTI6
Indicator: Determine target activity if QTYMG - standard value 6

Target activity is determined in these cases at quantity bookings.

5.2 Table /FFMES/CONF_QTY (optional)

5.2.1 Main purpose

Maintain this table when there is a need to adjust the target quantity in IDoc download of production order data according to expected confirmation quantity and confirmations on predecessor operation.

5.2.2 Functionality

/FFMES/CONF_QTY is an application table. Content of this table is not transported and must be maintained separately in each system.

Target quantity of production order operation is transferred to the FORCAM system in the field **MGVRG (AFOLG segment)**.

Expected confirmation quantity is influenced by previously booked confirmations on predecessor operations. There is SAP standard customizing which must be adjusted accordingly.


If status **CNF** is set into actual operation then all relevant operations will be sent in download IDoc. In this case, booked quantity of good parts in the predecessor operation will be set as target quantity of successor operations.

This table is relevant for IDoc download to the FORCAM system (IDocs in outbox).

Conditions from table **/FFMES/CONF_QTY** are checked within the SAP adapter package.

5.2.3 Table Maintenance


Table **/FFMES/CONF_QTY** must be maintained to activate the logic of target quantity adjustment as described. This table is plant specific and has the following structure:

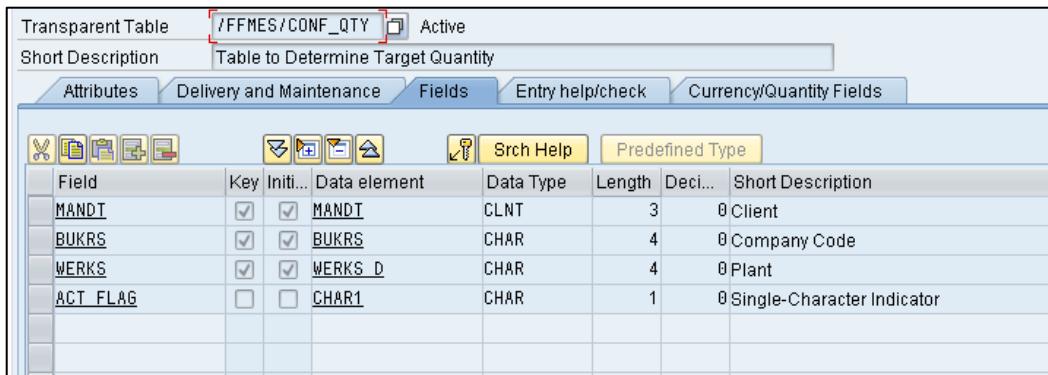

| Field | Key | Initi... | Data element | Data Type | Length | Deci... | Short Description |
|----------|-------------------------------------|-------------------------------------|--------------|-----------|--------|---------|----------------------------|
| MANDT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | MANDT | CLNT | 3 | 0 | Client |
| BUKRS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | BUKRS | CHAR | 4 | 0 | Company Code |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | 0 | Plant |
| ACT_FLAG | <input type="checkbox"/> | <input type="checkbox"/> | CHAR1 | CHAR | 1 | 0 | Single-Character Indicator |

Fig. 20: Structure of table /FFMES/CONF_QTY

An example entry might look like this:

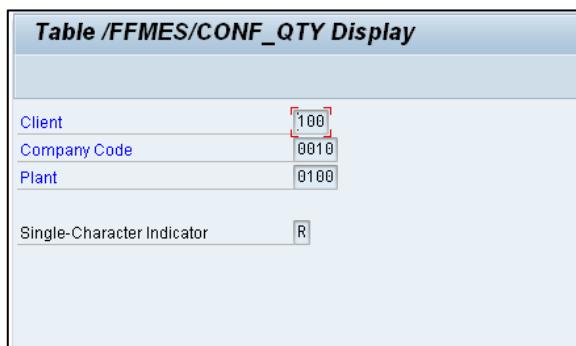

| Table /FFMES/CONF_QTY Display | |
|-------------------------------|------|
| Client | 100 |
| Company Code | 0010 |
| Plant | 0100 |
| Single-Character Indicator | R |

Fig. 21: Example entry of table /FFMES/CONF_QTY

The Single-Character Indicator can have the values R or Q.

- R:
Operation quantity from SAP table **AFVV**. Confirmed good quantity minus scrap is used if status **CNF** is active in a predecessor operation
- Q:
Field **SMENG** is used, which is determined by calling SAP function module **CO_RU_DET_CONF_QUANTITY**.

5.3 Table /FFMES/CONST (optional)

5.3.1 Main purpose

Maintain this table when configurable constants shall be used to adjust adapter functionality.

5.3.2 Functionality

/FFMES/CONST is an application table. Content of this table is not transported and must be maintained separately in each system.

There are existing constants which can be activated and used by maintaining table **/FFMES/CONST**. In addition to that, new customer specific constants can be implemented. Coding for additional constants must be implemented in existing enhancement methods.

Existing constants are:

- S:
Switch off IDoc inbox serialization for specified FORCAM record type.
- W:
Waiting time in seconds per plant or single work center. This waiting time is used in IDoc processing (check lock entries, check predecessor for IDoc serialization).

This table is relevant for IDoc upload from the FORCAM system to SAP (IDocs in inbox). Conditions from table **/FFMES/CONST** are checked within the SAP adapter package.

5.3.3 Table Maintenance

Table **/FFMES/CONST** must be maintained to activate the configurable constants.

Entries can be created plant or work center specific. Sequence number allows combined entries. Field **C_USE** must contain the abbreviation for the respective constant (e.g. "W" for configurable waiting time).

| Field | Key | Initiat... | Data element | Data Type | Length | Deci... | Short Description |
|--------|-------------------------------------|-------------------------------------|---------------|-----------|--------|---------|---------------------|
| MANDT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | MANDT | CLNT | 3 | 0 | Client |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | 0 | Plant |
| ARBPL | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | ARBPL | CHAR | 8 | 0 | Work center |
| LFD_NO | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | LFDNR | CHAR | 3 | 0 | Sequence Number |
| C_USE | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | /FFMES/ZFLAG | CHAR | 1 | 0 | Editing indicator |
| CVALUE | <input type="checkbox"/> | <input type="checkbox"/> | /FFMES/CVALUE | CHAR | 100 | 0 | Value for Constants |

Fig. 22: Structure of table /FFMES/CONST

An example entry with constant **S** might look like this:

| Table /FFMES/CONST Display | |
|----------------------------|-------|
| Client | 100 |
| Plant | 0100 |
| Work center | |
| Sequence Number | 1 |
| EID | S |
| Val for Constants | INTST |

Fig. 23: Example entry with constant S

Additional entries must be maintained for each record type which should not have serialization on PO operation level. The following example shows switching off serialization for record types **INTST** and **INTND**.

| SAP-Adapter : Configurable Constants | | | | |
|--------------------------------------|----------|-----|-----|-------------------|
| Plnt | Work ctr | No. | EID | Val for Constants |
| 0100 | | 1 | S | INTST |
| 0100 | | 2 | S | INTND |
| | | | | |
| | | | | |
| | | | | |

Fig. 24: Switching off serialization for record types INTST and INTND

An example entry with constant **W** might look like this:

| Table /FFMES/CONST Display | |
|----------------------------|----------|
| Client | 100 |
| Plant | 0100 |
| Work center | 00502700 |
| Sequence Number | 1 |
| EID | W |
| Val for Constants | 3 |

Fig. 25: Example entry with constant W

5.4 Table /FFMES/DELETE_PO (optional)

5.4.1 Main purpose

Maintain this table when there is a need to create and send out deletion records for production orders at specific order status, apart from **COMPL** and **TECO**.

5.4.2 Functionality

/FFMES/DELETE_PO is an application table. Content of this table is not transported and must be maintained separately in each system.

Standard deletion records are only created in FORCAM production order download at certain order status (**COMPL** and **TECO**).

The term “status” stands here for the SAP system status.

Table **/FFMES/DELETE_PO** must be maintained if a different creation of deletion records is wanted. The functional logic is implemented in such a way that *either* standard deletion records are created or deletion records at status values of table **/FFMES/DELETE_PO**.

This table is relevant for the IDoc download to the FORCAM system (IDocs in outbox).

Conditions from table **/FFMES/DELETE_PO** are checked within the SAP adapter package.

| Field | Key | Initi... | Data element | Data Type | Length | Deci... | Short Description |
|----------|-------------------------------------|-------------------------------------|--------------|-----------|--------|---------|----------------------------|
| BUKRS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | BUKRS | CHAR | 4 | 0 | Company Code |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | 0 | Plant |
| AUART | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | AUFART | CHAR | 4 | 0 | Order Type |
| STSMA | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | J_STSMA | CHAR | 8 | 0 | Status Profile |
| ESTAT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | J_STATUS | CHAR | 5 | 0 | Object status |
| PO_LEVEL | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | CHAR1 | CHAR | 1 | 0 | Single-Character Indicator |

Fig. 26: Structure of table /FFMES/DELETE_PO

The following table describes the table fields of /FFMES/DELETE_PO:

Table 1: Fields of table /FFMES/DELETE_PO

| Field | Description |
|-----------------|--|
| BUKRS | Actual company code where user is logged on |
| WERKS | Plant number (conditions must be set for each plant) |
| AUART | Order type for which the condition is valid |
| STSMA | Status profile in which "deletion relevant" status is included (blank = for all) |
| ESTAT | System status for deletion record (in internal notation, e.g. I0009) |
| PO_LEVEL | Level where check is applied (H = header, O = operation) |

5.4.3 Table Maintenance

Users must be aware that standard deletion records are not created if table **/FFMES/DELETE_PO** is not empty. I.e. all status entries producing deletion records must be maintained in the table. The status must be entered in internal format. Values for that are found in table **TJ02T** (system status).

An example entry might look like this:

Table /FFMES/DELETE_PO Display

| | |
|----------------------------|-------|
| Company Code | 0010 |
| Plant | 0100 |
| Order Type | PP01 |
| Status Profile | |
| Status | I0045 |
| Single-Character Indicator | 0 |

Fig. 27: Example entry of table /FFMES/DELETE_PO

5.5 Table /FFMES/FILTER (optional)

5.5.1 Main purpose

Maintain this table when there is a need to filter out certain production orders or production order operations from being sent via the FORCAM interface.

5.5.2 Functionality

/FFMES/FILTER is a customizing table. Content of this table is transported and must be maintained only in development/customizing system. Changes must be imported via transport request.

This table is used for definition of certain filter conditions which allow to exclude production orders or production order operations from transfer to the FORCAM system.

This table is relevant for IDoc download to the FORCAM system (IDocs in outbox).

Conditions from table **/FFMES/FILTER** are checked within the SAP adapter package (more details can be found in method **DYNAMIC_FILTER**).

| Field | Key | Initi... | Data element | Data Type | Length | Deci... | Short Description |
|-------|-------------------------------------|-------------------------------------|--------------------|-----------|--------|---------|---------------------|
| MANDT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | MANDT | CLNT | 3 | 0 | Client |
| AKTIV | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | /FFMES/AKTIVJN | CHAR | 1 | 0 | Flag active Y/N |
| FMODE | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | /FFMES/FILTERMO... | CHAR | 1 | 0 | Filter type Head/Op |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | 0 | Plant |
| FCOND | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | /FFMES/FILTERCO... | NUMC | 5 | 0 | Filter condition |
| FIELD | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | FIELDNAME | CHAR | 30 | 0 | Field Name |
| FVALU | <input type="checkbox"/> | <input type="checkbox"/> | /FFMES/FILTERVA... | CHAR | 100 | 0 | Filter Value |

Fig. 28: Structure of table /FFMES/FILTER

The following table describes the table fields of **/FFMES/FILTER**:

Table 2: Fields of table /FFMES/FILTER

| Field | Description |
|--------------------|---|
| MANDT | Actual client where user is logged on |
| AKTIV | Activity flag of a condition. If this flag has not been set for a specific condition, this condition will not be used for filter logic. |
| FMODE | Filter mode Header/Operation describes the level of filter usage. |
| WERKS | Plant number (conditions have to be set for each plant) |
| FCOND | Condition number is crucial for identification of condition combination. Entries with the same condition number are connected by a logical AND. Entries which have a different condition number are interpreted as OR blocks. |
| FIELD/FVALU | Combination of field and if characteristic which should cause a filtering |

5.5.3 Table Maintenance

The following picture shows a possible filter condition. Operations which fit those conditions are not transferred to the FORCAM system:

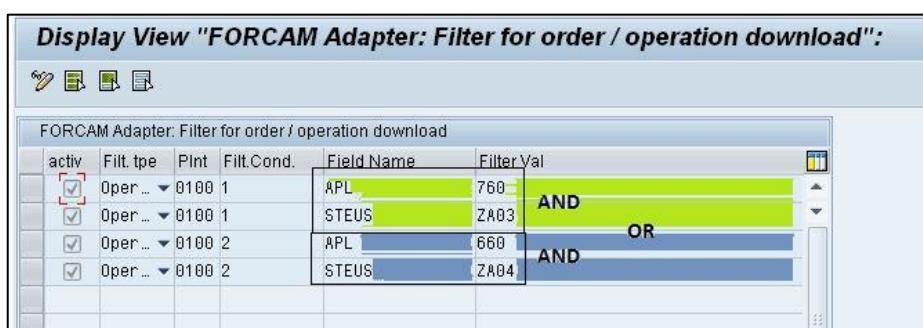


Fig. 29: Filter condition for production order download (example)

In table **/FFMES/FILTER** all conditions are checked which are active and belong to the plant of production order operation.

An operation will be filtered out and not sent to the FORCAM system if one of the defined AND conditions in **/FFMES/FILTER** table applies.

5.6 Table /FFMES/SKIP_MSG (optional)

5.6.1 Main purpose

Maintain this table when incoming messages from certain FORCAM relevant work centers must be skipped.

5.6.2 Functionality

/FFMES/SKIP_MSG is an application table. Content of this table is not transported and must be maintained separately in each system.

Incoming messages for certain work centers can be skipped in SAP (not being processed) if it is not possible to suppress sending from MES.

Table /FFMES/SKIP_MSG must be maintained for all work centers whose messages should not be processed in SAP.

This table is relevant for IDoc Upload from the FORCAM system into SAP (IDocs in inbox).

Logic is implemented in inbound function module /FFMES/IDOC_INPUT_MESSAGE.

| Field | Key | Initi... | Data element | Data Type | Length | Deci... | Short Description |
|-------|-------------------------------------|-------------------------------------|--------------|-----------|--------|---------|-------------------|
| MANDT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | MANDT | CLNT | 3 | | 0 Client |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | | 0 Plant |
| ARBPL | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | ARBPL | CHAR | 8 | | 0 Work center |

Fig. 30: Structure of table /FFMES/SKIP_MSG

5.6.3 Table Maintenance

Table entries must be created for all relevant work centers which should not receive any bookings from FORCAM system.

An example entry might look like this:

| Table /FFMES/SKIP_MSG Display | |
|-------------------------------|----------|
| Client | 100 |
| Plant | 0100 |
| Work center | 00502700 |

Fig. 31: Example entry of table /FFMES/SKIP_MSG

All incoming messages (basic type /FFMES/R) for this work center and plant will not be booked by the interface. No error IDocs will be produced.

5.7 Table /FFMES/STATUS (optional)

5.7.1 Main purpose

Maintain this table when there is a need to set customer status accordingly into production order operation after receiving certain messages from the FORCAM system.

5.7.2 Functionality

/FFMES/STATUS is a customizing table. Content of this table is transported and must be maintained only in development/customizing system. Changes must be imported via transport request.

This table is used for mapping of FORCAM order status into SAP user status values. Certain user status values can be set during processing of status messages (MES record types **OPSTR**, **OPINT** or **OPEND**).

User status logic must be activated in table **/FFMES/GLOBAL**.

Flag "Status logic act." must be switched on.

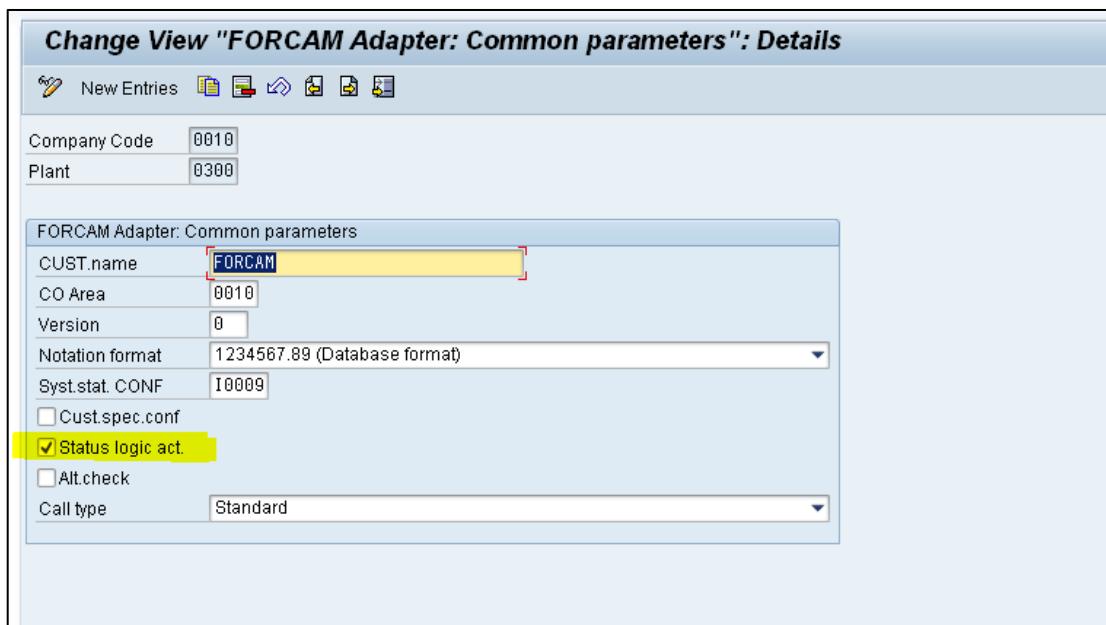


Fig. 32: Flag Status logic act.

Table **/FFMES/STATUS** is checked while receiving IDocs from the connected FORCAM system (IDocs in inbox).

| Field | Key | Init... | Data element | Data Type | Length | Deci... | Short Description |
|-------|-------------------------------------|-------------------------------------|--------------|-----------|--------|---------|-------------------------------|
| MANDT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | MANDT | CLNT | 3 | 0 | Client |
| BUKRS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | BUKRS | CHAR | 4 | 0 | Company Code |
| WERKS | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | WERKS_D | CHAR | 4 | 0 | Plant |
| AUART | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | AUFART | CHAR | 4 | 0 | Order Type |
| AUSTA | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | /FFMES/AUSTA | CHAR | 2 | 0 | FACT order status |
| STSMA | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | J_STSMA | CHAR | 8 | 0 | Status Profile |
| ESTAT | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | J_STATUS | CHAR | 5 | 0 | Object status |
| INACT | <input type="checkbox"/> | <input type="checkbox"/> | J_INACT | CHAR | 1 | 0 | Indicator: Status Is Inactive |

Fig. 33: Structure of table /FFMES/STATUS

The field "INACT" means that previously set user status values must be deactivated before setting the new status value.

5.7.3 Table Maintenance

An example entry might look like this:

| FORCAM Adapter: Map Status | | | | | | |
|----------------------------|------|------|------------|----------|-------|--------------------------|
| Co... | Plnt | Type | FACTstatus | StatProf | Stat. | I |
| 0010 | 0100 | PP01 | 50 | FCPR0D | E0004 | <input type="checkbox"/> |

Fig. 34: Example entry of table /FFMES/STATUS

- CoCode:
Company code of production order
- Plnt:
Plant of production order
- TYPE:
Order type of the production order from received MES message
- FACT Status:
MES order status from received MES message
- StatProf:
Status profile to be used for setting user status
- Stat:
User status to be set (internal name from table **TJ30T**)
- I:
Deactivate existing status before setting new user status value

5.8 Table /FFMES/STDVAL (optional)

5.8.1 Main purpose

Maintain this table when there is a need to map SAP standard values to the MES (FORCAM) standard values due to a different assignment of standard values in SAP (to be used in time confirmations on production order operations sent by FORCAM interface via inbox IDocs).

5.8.2 Functionality

/FFMES/STDVAL is an application table. Content of this table is not transported and must be maintained separately in each system.

This table is used for mapping the MES time base to the SAP standard values while posting the confirmations sent via messages from FORCAM. Standard values in FORCAM are 1= Setup, 2= Production, 3= Labor time.

These values can be differently assigned in SAP, e.g. 1 = Production/processing time.

The table is used if there are no specific entries in the /FFMES/VERTEILER table for mapping the MES time base to a specific standard value. Assignment of specific standard values can be maintained in the table for plant, work center category, standard value key, work center and MES time base. MES time base describes the FORCAM system activity types (e.g. manufacturing time).

An entry in this table may look like this:

| Table /FFMES/STDVAL Display | |
|-----------------------------|------|
| Check Table... | |
| Client | 100 |
| Plant | 0100 |
| Work center cat | |
| Std val. key | |
| Work center | |
| Time Base | LAPP |
| Default Val | 3 |
| Act. Type | |
| Default MES | 3 |

Fig. 35: Example entry in table /FFMES/STDVAL

The next picture shows another example of table entries in which different standard values are defined for specific work centers. It illustrates the assignment of different activity types for time posting:

| /FFMES/STDVAL: Display of Entries Found | | | | | | |
|---|-------|---------------|--------------------------------------|-----------|---------------|---------|
| Table to be searched | | /FFMES/STDVAL | SAP-Adapter : Dynamic standard value | | | |
| Number of hits | | 18 | | | | |
| Runtime | | 0 | Maximum no. of hits | | | |
| Plant | Cat. | SVK | Work ctr | Time Base | Default ACTTP | Def.MES |
| 0150 | | | LAPP | 3 | 100 | 3 |
| 0150 | | | LAPR | 2 | 130 | 2 |
| 0150 | | | LARU | 1 | 120 | 1 |
| 0150 | 42250 | | LARU | 1 | 120 | 1 |
| 0150 | 42310 | | LAPP | 3 | 110 | 3 |
| 0150 | 42310 | | LAPR | 2 | 130 | 2 |
| 0150 | 42310 | | LARU | 1 | 120 | 1 |
| 0150 | 42330 | | LAPP | 3 | 110 | 3 |
| 0150 | 42330 | | LAPR | 2 | 130 | 2 |
| 0150 | 42330 | | LARU | 1 | 120 | 1 |
| 0150 | 42340 | | LAPP | 3 | 110 | 3 |
| 0150 | 42340 | | LAPR | 2 | 130 | 2 |
| 0150 | 42340 | | LARU | 1 | 120 | 1 |
| 0150 | 42350 | | LAPP | 3 | 110 | 3 |
| 0150 | 42350 | | LAPR | 2 | 130 | 2 |
| 0150 | 42360 | | LAPP | 3 | 110 | 3 |
| 0150 | 42360 | | LAPR | 2 | 130 | 2 |
| 0150 | 42360 | | LARU | 1 | 120 | 1 |

Fig. 36: Sample entries for /FFMES/STDVAL with assignment of different activity types for time confirmations on PO operations

5.8.3 Table Maintenance

Activity type for booking of confirmation is read with time base sent by MES message from table /FFMES/VERTEILER. If no entry has been found there, then table /FFMES/STDVAL will be used. Table /FFMES/STDVAL can be used for mapping in upload scenarios (PO confirmation) or download scenarios (Transfer PO data).

For all reading attempts in upload scenarios, additionally the MES time base will be used.

- At first, the table will be read with key fields **Plant** and **work center** from MES message (Inbox IDoc).
- Next attempt will be made with:
 - **Plant, work center type, control key**
No work center should be specified in that table entry (left blank).
- Next attempt will be made with:
 - **Plant and work center type**
No control key and no work center should be specified in that table entry (both fields left blank).
- Next attempt will be made with:
 - **Plant and control key**
No work center type and no work center should be specified in that table entry (both fields left blank).
- Next attempt will be made with:
 - **Plant**
No work center type, no control key and no work center should be specified in that table entry (all 3 fields left blank).

- ⚠ Important for upload (confirmation bookings):
If no specified entry has been found after all those attempts, then the standard value for this booking will be filled with zero.
- ⚠ Any unwanted zero booking of durations or activities might be an indicator for wrong maintenance of table **/FFMES/STDVAL**.
- ⚠ If an entry has been found, the results will be mapped accordingly into target fields for download (**AFOLG-VGWxx**) or Upload (**AFVV-VGWxx**). A mapping is also possible for specially wanted activity types.

6 Annex: Table of Figures

| | |
|--|----|
| <i>Fig. 1: SAP screen displaying the IDoc structure</i> | 8 |
| <i>Fig. 2: Display Control Record screen</i> | 9 |
| <i>Fig. 3: SAP screen displaying Data Record.....</i> | 9 |
| <i>Fig. 4: SAP screen displaying Status Record.....</i> | 10 |
| <i>Fig. 5: SAP Screen IDoc List</i> | 11 |
| <i>Fig. 6: Selection Screen of Report RC1_IDOC_SET_STATUS</i> | 12 |
| <i>Fig. 7: SAP screen Partner profiles: Outbound parameters</i> | 13 |
| <i>Fig. 8: SAP screen Partner profiles: Inbound parameters</i> | 13 |
| <i>Fig. 9: Selection screen for IDoc list</i> | 14 |
| <i>Fig. 10: SAP screen: Status Monitor for ALE Messages.....</i> | 14 |
| <i>Fig. 11: FORCAM Adapter screen for re-processing IDocs</i> | 15 |
| <i>Fig. 12: FORCAM Adapter screen after Re-Processing IDocs</i> | 15 |
| <i>Fig. 13: SAP screen displaying Status Records</i> | 15 |
| <i>Fig. 14: Selection screen of report RBDMANIN.....</i> | 16 |
| <i>Fig. 15: Selection screen of report RBDAPP01</i> | 17 |
| <i>Fig. 16: Selection screen of Report /FFMES/IDOC_DELETE</i> | 18 |
| <i>Fig. 17: Selection screen of report /FFMES/RBDAGAIN_HTTP</i> | 18 |
| <i>Fig. 18: Selection screen of report /FFMES/TRANSFER_ORDER_SPEC</i> | 19 |
| <i>Fig. 19: Activated parameter in table /FFMES/CONTROL</i> | 20 |
| <i>Fig. 20: Structure of table /FFMES/CONF_QTY.....</i> | 25 |
| <i>Fig. 21: Example entry of table /FFMES/CONF_QTY.....</i> | 25 |
| <i>Fig. 22: Structure of table /FFMES/CONST</i> | 26 |
| <i>Fig. 23: Example entry with constant S.....</i> | 27 |
| <i>Fig. 24: Switching off serialization for record types INTST and INTND</i> | 27 |
| <i>Fig. 25: Example entry with constant W.....</i> | 27 |
| <i>Fig. 26: Structure of table /FFMES/DELETE_PO</i> | 28 |
| <i>Fig. 27: Example entry of table /FFMES/DELETE_PO</i> | 29 |
| <i>Fig. 28: Structure of table /FFMES/FILTER</i> | 30 |
| <i>Fig. 29: Filter condition for production order download (example).....</i> | 31 |
| <i>Fig. 30: Structure of table /FFMES/SKIP_MSG</i> | 32 |
| <i>Fig. 31: Example entry of table /FFMES/SKIP_MSG.....</i> | 32 |
| <i>Fig. 32: Flag Status logic act</i> | 33 |
| <i>Fig. 33: Structure of table /FFMES/STATUS</i> | 34 |
| <i>Fig. 34: Example entry of table /FFMES/STATUS</i> | 34 |
| <i>Fig. 35: Example entry in table /FFMES/STDVAL</i> | 35 |
| <i>Fig. 36: Sample entries for /FFMES/STDVAL with assignment of different activity types for time confirmations on PO operations</i> | 36 |